


TAPER DIMENSIONS AND ELECTRODE CODING



Standard Tapered Electrode Theoretical Dimensions	Taper Size	Standard Male Taper Cap Taper Dimensions
--	------------	---

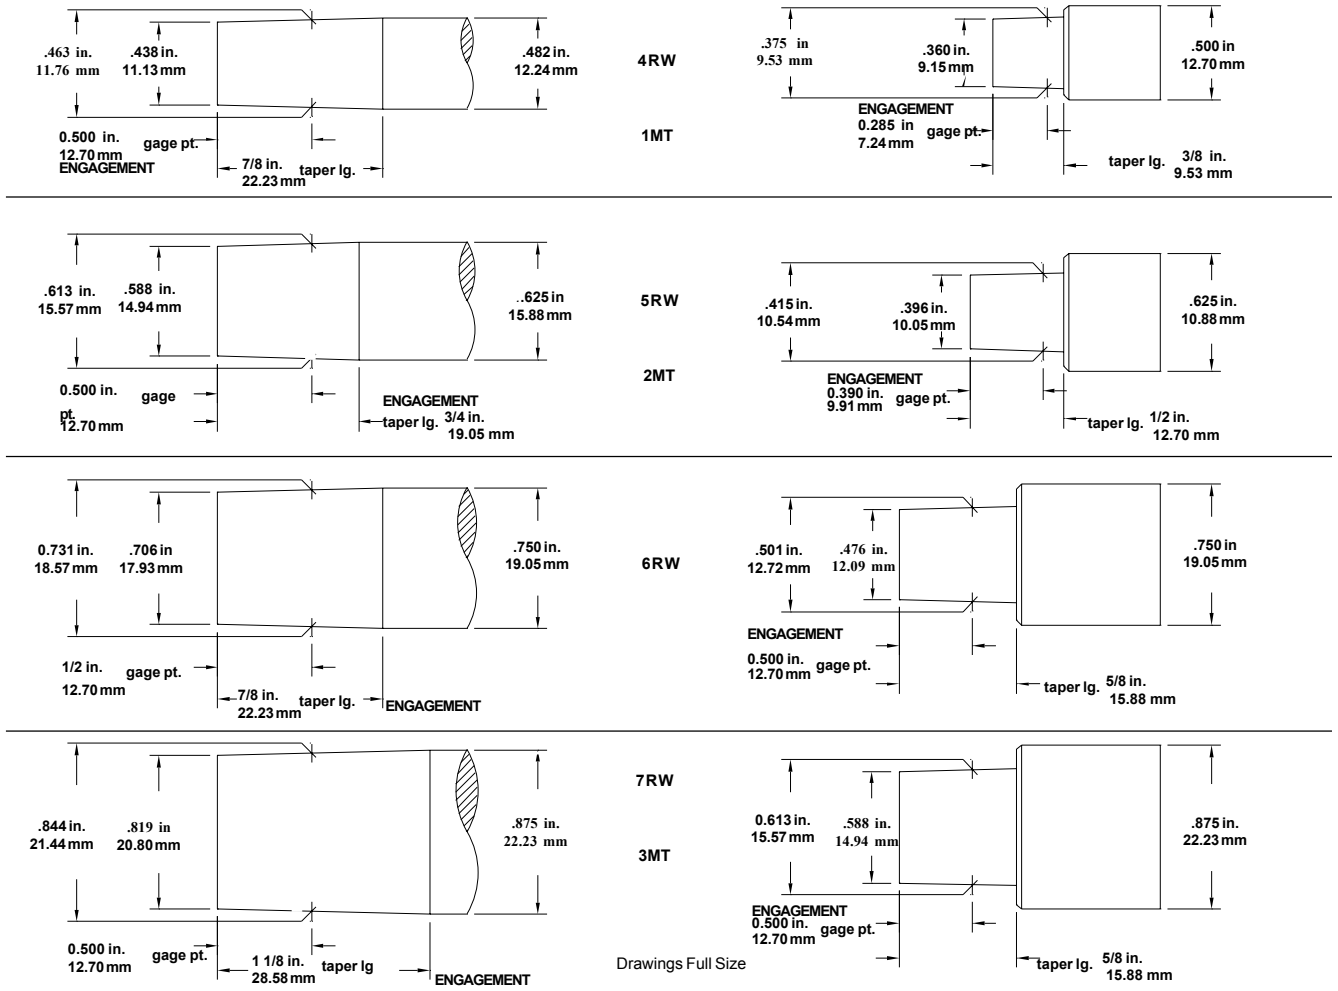

CMW CODING FOR STRAIGHT TAPERED ELECTRODES

X X X X X

Material	Nose	Attachment	Length
1 = CMW® 28	1 = Dome	1 = No. 4RW	1 = 1"
	2 = Pointed	No. 1MT	2 = 1 1/4"
3 = CMW® 3	3 = Flat		3 = 1 1/2"
5 = CMW® 100	4 = Offset	2 = No. 5RW	4 = 1 3/4"
6 = ELKONITE® 10W3	5 = 2" Sph. R	No. 2MT	5 = 2"
7 = ELKONITE® TC5	6 = 10" Sph. R.		6 = 2 1/4"
8 = ELKON® 100M	7 = Truncated	3 = No. 7RW	7 = 2 1/2"
9 = ELKON® 100W	8 = 3" Sph. R	No. 3MT	8 = 2 3/4"
	9 = 4" Sph. R		9 = 3"
	0 = Shank for Male Cap	4 = No. 6RW	12 = 3 1/4"
			14 = 3 1/2"
			16 = 3 3/4"
			18 = 4"
			20 = 4 1/4"
			22 = 4 1/2"
Note: Prefix MP = Shank for Female Cap			

RWMA CODING FOR STRAIGHT TAPERED ELECTRODES

X X X X X

Nose	Material	Attachment	Length in no. of 1/4"
A = Pointed	1 = RWMA CL 1 CMW® 28	4 = No. 4RW	04 = 1"
		No. 1MT	05 = 1 1/4"
			06 = 1 1/2"
B = Dome		5 = No. 5RW	07 = 1 3/4"
		No. 2MT	08 = 2"
C = Flat	2 = RWMA CL 2 CMW® 3	6 = No. 6RW	09 = 2 1/4"
			10 = 2 1/2"
			11 = 2 3/4"
D = Offset		7 = No. 7RW	12 = 3"
		No. 3MT	13 = 3 1/4"
			14 = 3 1/2"
E = Truncated	3 = RWMA CL 3 CMW® 100	8 = 2 3/4"	15 = 3 3/4"
			16 = 4"
			17 = 4 1/4"
			18 = 4 1/2"

REF